

[RFT Series] Taped Axial Lead Bending Machine 帶式電阻彎腳成型機

- 保養容易，操作方便，不受空間限制不需進行人員培訓。
Easy maintenance, simple operation, and suitable for using on limited space. No training required.
 - 對電阻及二極體之切斷及折彎曲加工能力強。Excellent cutting or bending performance for resistors and diodes.
 - 每小時量可達 40000~60000 個零件。The production capacity is up to 60000 pcs/hr.
 - 手搖式經濟性高不受外來因素影響(如停電)。Low capital investment. Never be affected by black out!
 - 體積輕巧，可安裝、夾於桌面上 It is light and compact enough to be installed on a bench top
 - 堅固耐用，投資報酬值高。 Durable and high turn-over rate!
- 若有特殊規格，歡迎來圖訂製。Customization according to your specification is available.

HRFT-301 手搖帶式電阻成型機 Manual Tapped Axial Lead Former

尺寸 Dimension: 430L x300W x 280H mm

重量 Weight: 8kgs

加工量 Capacity: 25,000pcs/ hr

RFT-201 帶式電阻成型機 Taped Axial Lead Forming Machine

電壓 Power: 110/220 V AC. 60/50HZ

尺寸 Dimension:520(L),380(Width),300(H)mm

重量 Weight: 24 Kgs. For taped packed components.




HRFT-301 Series


彎腳模式 Bending Types	專用型	標準型	加強型	直立型
Models, parameters 型號,	Slim	Standard	Heavy duty	Vertical
Manual	HRFT-301S	HRFT-301U	----	HRFT-301F
Motorized	RFT-201S	RFT-201U	RFT-201W	RFT-201F
A- 腳距 Pitch (Body Length for F).	5-40 mm	6-40 mm	6-40 mm	4-18 mm
B- 腳長 Lead Length	3.6-10 mm	3.6-10 mm	3.6-10 mm	Adjustable
C- 肩距 Shoulder	0.6 Min	1.2 Min	1.2 Min	4 Min
D- 本體直徑 Body Diameter	1.5-8 mm	1.5-8 mm	1.5-8 mm	1.5-8 mm
H- 另腳長 Support Length	----	----	----	25 Max
W- 線徑 Lead Wire Diameter	Ø0.35- Ø0.6 Ø0.35- Ø0.8	Ø0.35- Ø0.8	---- Ø0.35- Ø1.5	Ø0.35- Ø0.8
P- 腳距 Pitch	----	----	----	2.5-13.5
R- 彎腳角度 Bending Angle	----	----	----	1
加工量 Capacity	40000pcs/H	84000pcs/H	40000pcs/H	40000pcs/H



RFT-201U Standard
RFT-201S Slim
RFT-201W Heavy Duty
RFT-201F Vertical Lead forming

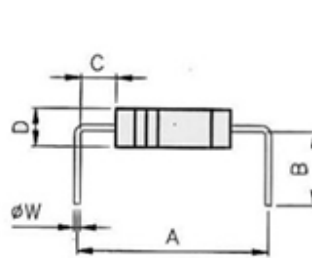

HRFT-301U
HRFT-301S
RFT-201U
RFT-201S
RFT-201W

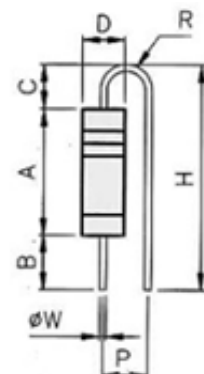

HRFT-301F
RFT-201F